

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/030225 A1

(51) International Patent Classification⁷: **H03M 13/27**,
G06F 7/48

Paris (FR). **TABAKOV**, Yordan [BG/FR]; 156 Bd Hauss-
mann, F-75008 Paris (FR).

(21) International Application Number:
PCT/IB2003/003943

(74) Agent: **DE LA FOUCHARDIERE**, Marie-Noëlle;
Société Civile SPID, 156 Boulevard Haussmann, F-75008
Paris (FR).

(22) International Filing Date:
10 September 2003 (10.09.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02/11839 25 September 2002 (25.09.2002) FR

(71) Applicant (*for all designated States except US*): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CHARPENTIER**,
Sébastien [FR/FR]; 156 Boulevard Haussmann, F-75008

[Continued on next page]

(54) Title: CIRCUIT FOR RECURSIVELY CALCULATING DATA

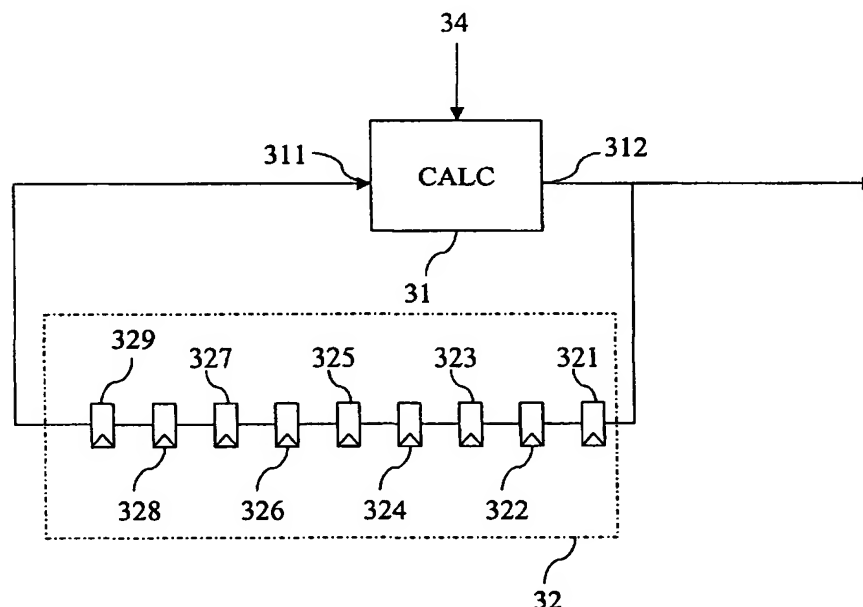

(57) Abstract: The invention relates to a circuit for calculating a second data set based on a first data set calculated by at least a calculation device (31) that is capable of calculating a data in a predefined number of clock cycles. The calculation device has an input (311) and an output (312). The circuit comprises transport means (32) for routing a data of the first data set from the output to the input of said calculation device, in a number of clock cycles depending on the number of data of the first data set and on the predefined number of cycles necessary for the calculation of one data. A data advances through said transport means with each clock cycle.